

PRODUCT SHEET

NAUSIFLOW 100 MAXI PUMP

Specifications:



Stage 4 pressure ulcers care

Alternating and static modes

Automatic pressure management

300 kg weight capacity

Class 1 medical device

Environmental conditions of use and storage:

- Temperature: 5°C - 45°C
- Humidity: 15% - 60%

Electrical Classification:

- Class II Type B, double insulation with or without ground wire.
- IPX0, do not immerse the pump in a liquid, do not spray liquid directly on the pump.
- This pump is not protected AP / APG (AP = flammable anesthetics in the air), (APG = flammable anesthetics with oxygen or nitrous oxide).


Standards: EN 60601-1, EN 60601-1-2, EN 61000-3-2, EN 61000-3-3, UL-2601-1

Electromagnetic compatibility: EN 60601-1-2: 1993

Consumption: in normal use, max 12 W

Power Cable: H05VV-F3x0.75mm²

This product complies with the requirements for the safety and health of the Directive 93/42/EC concerning medical devices and the basic requirements of Directive 86/336/EC on electromagnetic compatibility.

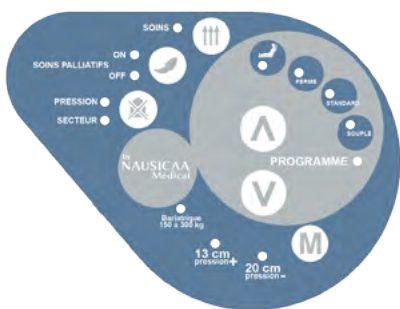

Functions:

Automatic pressure adjustment

Self-management of sitting positions (less than 2 hours)

Program for sitting positions (more than 2 hours)

Palliative Care Program

Management of mattresses in height of air 13 cm or 20 cm and patients between 150 kg and 300 kg.

Secure management of «static mode» (palliative care)

Delayed care position

Dynamic or automatic static according to the selected program

Visual and audible alarm: low pressure

Visual and audible alarm: power failure

Key features :

Air height 20 cm: Optimized management of a mattress in height of air 20 cm

Height of air 13 cm: Optimized management of a mattress in height of air 13 cm

Patient between 150 kg and 300 kg: Optimized management with activation of the second pump

Choice of the program: allows to choose between 4 different programs (flexible, standard, firm, position sitting more than 2 hours).

Delayed care position 30 minutes

Palliative care position

Power failure alarm indicator: lights up in case of power failure

Low Pressure and Power Failure Indicator: This indicator illuminates and the audible alarm sounds.

Stop / alarm button: turns off the alarm tone.

On / Off button: Turns the compressor on and off.